


The Belleria™

FP4320 Series




SPECIFICATION SHEET

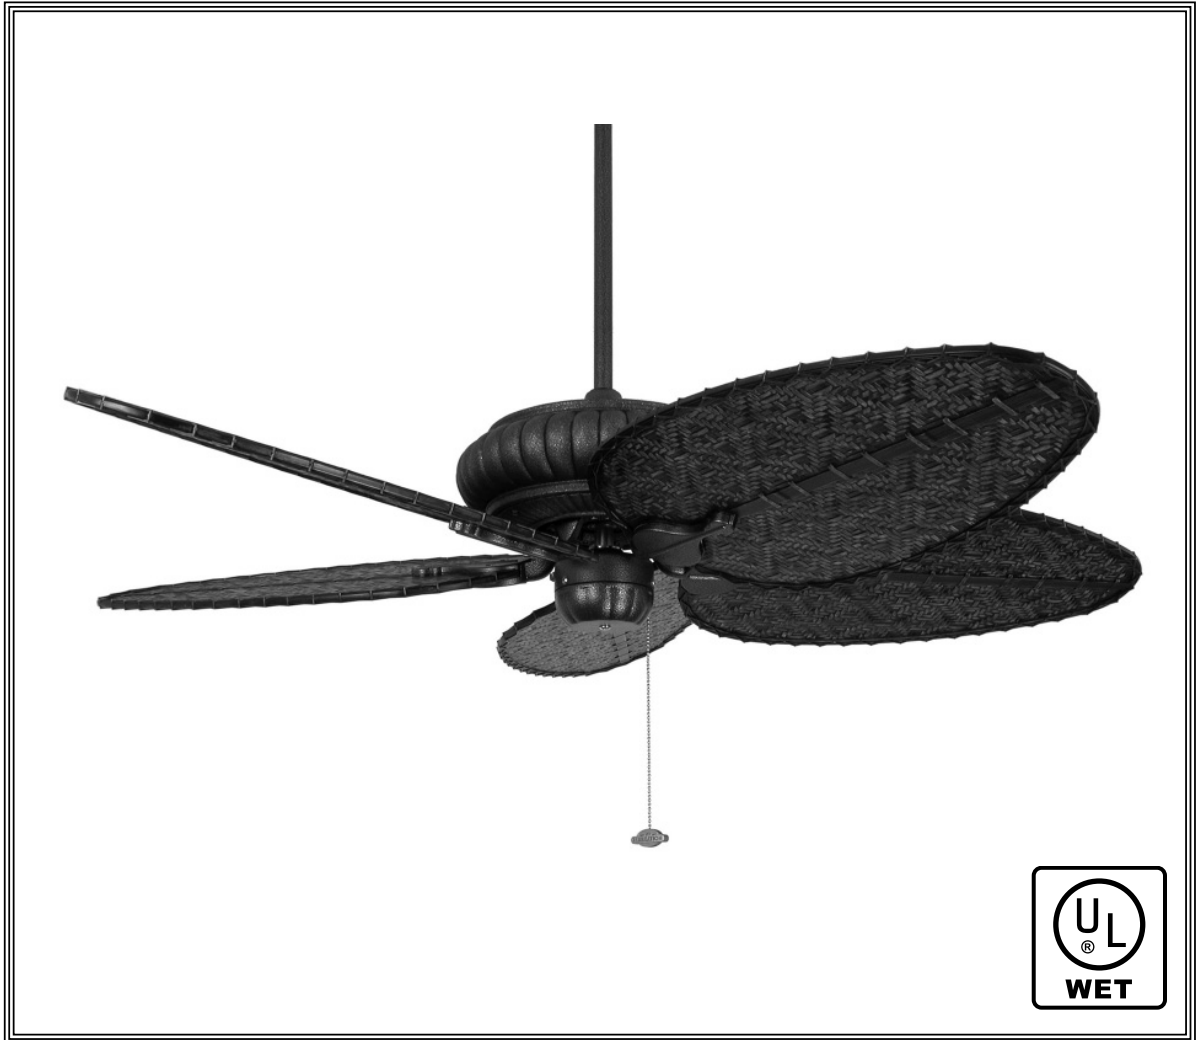

Product Specifications subject to change

The Belleria™ Fan Assembly – FP4320**

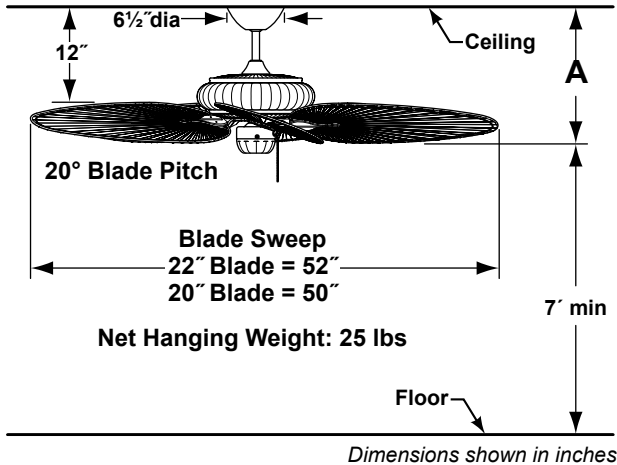

**Available Finishes

AG	Aged Copper
AN	Antique Nickel
AZ	Aged Bronze
LT	Latte
TB	Textured Black
TS	Tortoise Shell

Fan Assembly A

Fan w/6" downrod	15"
Fan w/12" downrod	21"
Fan w/18" downrod	27"
Fan w/24" downrod	33"
Fan w/36" downrod	45"
Fan w/48" downrod	57"
Fan w/60" downrod	69"
Fan w/72" downrod	81"

Available Plastic Blades

Palm Leaf	BPP1	Natural - 22" Wide Oval
Palm Leaf	BPP4	Natural - 22" Narrow Oval
Palm Leaf-Brown	BPP4BR	Painted - 22" Narrow Oval
Palm Leaf-Green	BPP4GR	Painted - 22" Narrow Oval
Woven Bamboo	BPD1A	Antique - 22" Wide Oval
Woven Bamboo	BPD4A	Antique - 22" Narrow Oval
Woven Bamboo	BPD4BL	Black - 22" Narrow Oval
Traditional Wood	BPW10CY	Cherry - 20" Narrow
Traditional Wood	BPW10WO	Washed Oak - 20" Narrow

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 3-speed pull-chain with reversing switch (on the motor).

Fan speeds: 1st Pull-High – 155 rpm; 2nd Pull-Med – 95 rpm; 3rd-Low – 65 rpm (with BPW blades)

BLADE OPTIONS:

Wet-Location (Plastic - BP, BPD & BPW Series) Palm, Bamboo, and Wood blades are available (sold separately in sets of 5). See Catalog or visit our website, www.fanimation.com for more information.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available, including a variety of four-light fixtures with a maximum of 240 watts. Some are water-sealed and UL wet location approved. See Catalog or visit our website, www.fanimation.com for more lighting options.

DOWN ROD OPTIONS:

The Belleria™ fan comes with a standard 6" wet-location down rod. Optional wet-location down rods are available in 12", 18", 24", 36", 48", 60", and 72". The Belleria™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a down rod longer than the standard 6" down rod. Optional sloped ceiling ball kits (SCB52) are available for up to 52°. Call tech support for more information.

DAMP / WET LOCATION:

Fan rated for both Damp & Wet Location usage.



**10983 Bennett Parkway
Zionsville, IN 46077
(888) 567-2055
FAX (866) 482-5215**

Outside U.S. call (317) 733-4113

Visit Our Website www.fanimation.com

