

# **The Keoki™**

**FP4120 Series**




## **SPECIFICATION SHEET**



*Product Specifications subject to change*

# The Keoki™ Fan Assembly – FP4120\*\*

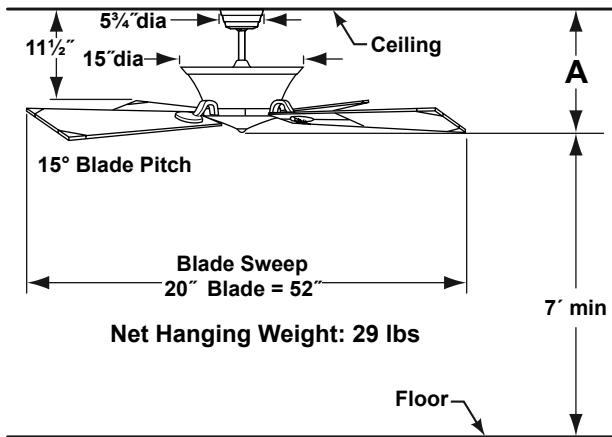

Dimensions shown in inches

Available Finishes	
BB	Brushed Brass / Oil-Rubbed Bronze w/ Mahogany Blades
SN	Satin Nickel / Black w/ Black Blades

Fan Assembly	A
Fan w/6" downrod	16"
Fan w/12" downrod	22"
Fan w/18" downrod	28"
Fan w/24" downrod	34"
Fan w/36" downrod	46"
Fan w/48" downrod	58"
Fan w/60" downrod	70"
Fan w/72" downrod	82"

## INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

## ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 4 fan speeds with reversing switch (on top of the motor).

**Fan Speeds:** Low – 40 rpm; Med – 70 rpm; Med-Hi – 100 rpm; High – 150 rpm

## CONTROL OPTIONS:

The fan & light, 4-speed (slide) wall control (C27) is included. Reversing switch located on top of fan housing. Installation and operating instructions provided with control.

## LIGHTING OPTIONS:

The 3-bulb (60 watt max) upright fixture is included with this fan assembly (candelabra bulbs - not included). Maximum wattage of upright not to exceed 180 watts. Fan is NOT down light adaptable.

## DOWN ROD OPTIONS:

The Keoki™ fan comes with a standard 6" down rod. Optional down rods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer down rod, a down rod coupler is available. The Keoki™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a down rod longer than the standard 6" down rod. Optional sloped ceiling ball kits (SCB52) are available for up to 52°. Call tech support for more information.

## BLADE SET:

Set of 4 wood blades are included with this fan. Not recommended for Damp Location.

## DAMP LOCATION:

Fan not rated for Damp Location usage.



10983 Bennett Parkway  
Zionsville, IN 46077  
(888) 567-2055  
FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website [www.fanimation.com](http://www.fanimation.com)

